




SKF-SUDAMERICAN,S.A.

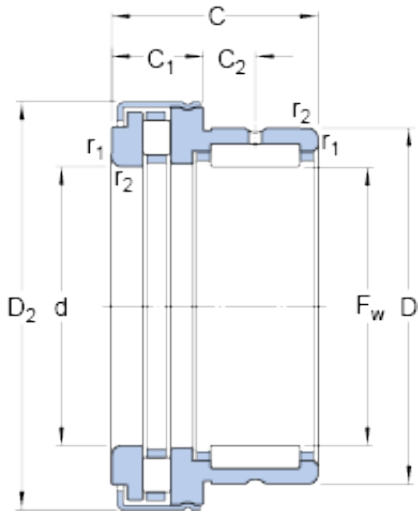

NKXR 15 Z Bearing 2D drawings and 3D CAD models

SKF NKXR 15 Z cylindrical roller bearings

Bearing No. NKXR 15 Z

Size	24x15x23 mm
Bore Diameter	24 mm
Outer Diameter	15 mm
Width	23 mm
F_w	15 mm
D	24 mm
C	23 mm
C_1	9 mm
C_2	6.5 mm
d	15 mm
D_2	29.2 mm
$r_{1,2}$ - min.	0.3 mm
d_a - min.	23.7 mm
r_a - max.	0.3 mm
r_b - max.	0.3 mm
d_i	12 mm
F	15 mm
B_i	16 mm
Basic dynamic load rating, radial direction - C	11 kN
Basic static load rating, radial direction - C_0	14 kN
Basic dynamic load rating, axial direction - C	11.2 kN
Basic static load rating, axial direction - C_0	27 kN



SKF-SUDAMERICAN,S.A.

Fatigue load limit, radial direction - P_u	1.7 kN
Fatigue load limit, axial direction - P_u	2.4 kN
Reference speed	4300 r/min
Limiting speed	8500 r/min
Mass bearing	0.045 kg
Category	Roller Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.05
EAN	7316570980271
Product Group	B04144
F_w	15 mm
C_1	9 mm
C_2	6.5 mm
D_2	29.2 mm
$r_{1,2}$ min.	0.3 mm
d_a min.	23.7 mm
r_a max.	0.3 mm
r_b max.	0.3 mm
d_i	12 mm
B_i	16 mm
Basic dynamic load rating, radial direction C	11 kN
Basic static load rating, radial direction C_0	14 kN
Basic dynamic load rating, axial direction C	11.2 kN
Basic static load rating, axial direction C_0	27 kN
Fatigue load limit, radial direction P_u	1.66 kN



SKF-SUDAMERICAN,S.A.

Fatigue load limit, axial direction P_u	2.45 kN
Minimum axial load factor A	0.000058
Inner ring	IR 12x15x16