




SKF-SUDAMERICAN,S.A.

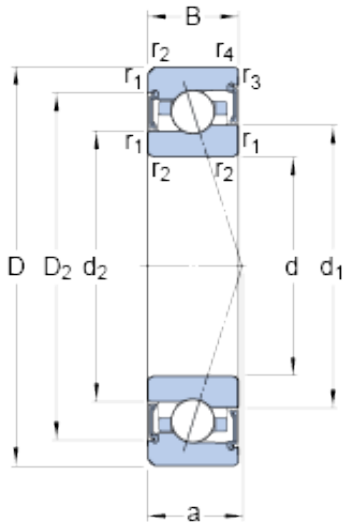

35 mm x 62 mm x 14 mm SKF S7007 ACE/HCP4A angular contact ball bearings

Bearing No. S7007 ACE/HCP4A

S7007 ACE/HCP4A Bearing 2D drawings and 3D CAD models

| | |
|---|-------------|
| Size | 62x35x14 mm |
| Bore Diameter | 62 mm |
| Outer Diameter | 35 mm |
| Width | 14 mm |
| d | 35 mm |
| D | 62 mm |
| B | 14 mm |
| d ₁ | 43.7 mm |
| d ₂ | 41.6 mm |
| D ₂ | 54.85 mm |
| r _{1,2} - min. | 1 mm |
| r _{3,4} - min. | 0.6 mm |
| a | 18.4 mm |
| d _a - min. | 39.6 mm |
| d _a - max. | 43.1 mm |
| d _b - min. | 39.6 mm |
| d _b - max. | 41 mm |
| D _a - max. | 57.4 mm |
| D _b - max. | 57.8 mm |
| r _a - max. | 1 mm |
| r _b - max. | 0.6 mm |
| Basic dynamic load rating - C | 11.1 kN |
| Basic static load rating - C ₀ | 6.3 kN |
| Fatigue load limit - P _u | 0.265 kN |



SKF-SUDAMERICAN,S.A.

| | |
|---------------------------------------|--------------|
| Limiting speed for grease lubrication | 36000 r/min |
| Ball - D_w | 7.144 mm |
| Ball - z | 17 |
| Calculation factor - e | 0.68 |
| Calculation factor - Y_2 | 0.87 |
| Calculation factor - Y_0 | 0.38 |
| Calculation factor - X_2 | 0.41 |
| Calculation factor - Y_1 | 0.92 |
| Calculation factor - Y_2 | 1.41 |
| Calculation factor - Y_0 | 0.76 |
| Calculation factor - X_2 | 0.67 |
| Preload class A - G_A | 100 N |
| Preload class B - G_B | 300 N |
| Preload class C - G_C | 590 N |
| Calculation factor - f | 1.06 |
| Calculation factor - f_1 | 0.99 |
| Calculation factor - f_{2A} | 1 |
| Calculation factor - f_{2B} | 1.03 |
| Calculation factor - f_{2C} | 1.06 |
| Calculation factor - f_{HC} | 1.01 |
| Preload class A | 88 N/micron |
| Preload class B | 132 N/micron |
| Preload class C | 171 N/micron |
| d_1 | 43.7 mm |
| d_2 | 41.6 mm |
| D_2 | 54.85 mm |
| $r_{1,2}$ min. | 1 mm |
| $r_{3,4}$ min. | 0.6 mm |
| d_a min. | 39.6 mm |



SKF-SUDAMERICAN,S.A.

| | |
|---|----------------|
| d_a max. | 43.1 mm |
| d_b min. | 39.6 mm |
| d_b max. | 41 mm |
| D_a max. | 57.4 mm |
| D_b max. | 57.8 mm |
| r_a max. | 1 mm |
| r_b max. | 0.6 mm |
| Basic dynamic load rating C | 11.1 kN |
| Basic static load rating C_0 | 6.3 kN |
| Fatigue load limit P_u | 0.265 kN |
| Attainable speed for grease lubrication | 36000 r/min |
| Ball diameter D_w | 7.144 mm |
| Number of balls z | 17 |
| Preload class A G_A | 100 N |
| Static axial stiffness, preload class A | 88 N/ μ m |
| Preload class B G_B | 300 N |
| Static axial stiffness, preload class B | 132 N/ μ m |
| Preload class C G_C | 590 N |
| Static axial stiffness, preload class C | 171 N/ μ m |
| Calculation factor f | 1.06 |
| Calculation factor f_1 | 0.99 |
| Calculation factor f_{2A} | 1 |
| Calculation factor f_{2B} | 1.03 |
| Calculation factor f_{2C} | 1.06 |
| Calculation factor f_{HC} | 1.01 |
| Calculation factor e | 0.68 |
| Calculation factor (single, tandem) Y_2 | 0.87 |
| Calculation factor (single, tandem) Y_0 | 0.38 |
| | |



SKF-SUDAMERICAN,S.A.

| | |
|---|---------|
| Calculation factor (single, tandem) X_2 | 0.41 |
| Calculation factor (back-to-back, face-to-face) Y_1 | 0.92 |
| Calculation factor (back-to-back, face-to-face) Y_2 | 1.41 |
| Calculation factor (back-to-back, face-to-face) Y_0 | 0.76 |
| Calculation factor (back-to-back, face-to-face) X_2 | 0.67 |
| Mass bearing | 0.14 kg |