




SKF-SUDAMERICAN,S.A.

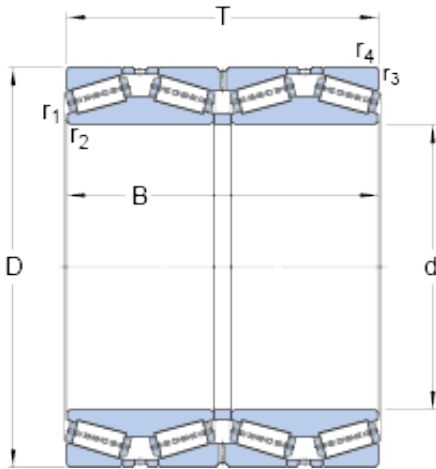

1500 mm x 1900 mm x 1080 mm SKF BT4B
332078/HA4 tapered roller bearings

Bearing No. BT4B 332078/HA4

BT4B 332078/HA4 Bearing 2D drawings and 3D CAD models

Size	1900x1500x1080 mm
Bore Diameter	1900 mm
Outer Diameter	1500 mm
Width	1080 mm
d	1500 mm
D	1900 mm
B	1080 mm
T	1080 mm
$r_{1,2}$ - min.	4 mm
$r_{3,4}$ - min.	12 mm
Basic dynamic load rating - C	46800 kN
Basic static load rating - C_0	170000 kN
Fatigue load limit - P_u	8300 kN
Comparative radial load rating - C_F	12500 kN
Comparative axial load rating - C_{Fa}	2140 kN
Thrust factor - K	1.68
Calculation factor - e	0.35
Calculation factor - Y_1	1.9
Calculation factor - Y_2	2.9
Calculation factor - Y_0	1.8
Mass bearing	7700 kg
Design variant/feature	TQO.1/GWI



SKF-SUDAMERICAN,S.A.

d_1	1575 mm
D_1	1750 mm
$r_{1,2}$ min.	4 mm
$r_{3,4}$ min.	12 mm
Basic dynamic load rating C	46800 kN
Basic static load rating C_0	170000 kN
Fatigue load limit P_u	8300 kN
Comparative radial load rating C_F	12500 kN
Comparative axial load rating C_{Fa}	2140 kN
Thrust factor K	1.68
Calculation factor e	0.35
Calculation factor Y_1	1.9
Calculation factor Y_2	2.9
Calculation factor Y_0	1.8